

VAPamore[®]

THE LOVE OF STEAM



MR50[®]

Portable Wet/Dry Steam Vac

USERS GUIDE AND INSTRUCTIONS




SAFETY INFORMATION

(Read and understand all safety information before using the MR-50 Steam - Vac)

1. Make sure the power outlet is rated to correct voltage for the MR-50 Steam - Vac.
2. Do not leave the MR-50 Steam -Vac unattended when plugged in to wall outlet.
3. Use the MR-50 Steam - Vac only for its intended use and only as described in this users guide.
4. Never operate the MR-50 Steam - Vac in dry steam or wet steam modes without water in the tank. This can cause permanent damage to the water pump and void the warranty.
5. Never operate the MR-50 Steam - Vac with a damaged power cord.
6. Do not handle the MR-50 Steam - Vac with wet hands.
7. Never allow water / liquid level in the removable dust collection reservoir to fill past the MAX level.
8. Do not use without the water tank cap in place.
9. The MR-50 Steam - Vac is for residential use only.
10. The MR-50 Steam - Vac emits steam and may heat up some areas of the unit during use.
11. Always make sure the dust collection reservoir and dust collection filter are in place before use.
12. Always operate the MR-50 Steam - Vac in a horizontal position when extracting liquid.
13. When operating do not turn the MR-50 Steam - Vac upside down.
14. Never use the power cord for carrying or lifting the machine.
15. Use close supervision when used around children.
16. Never immerse the MR-50 Steam - Vac in water or other liquids.
17. Never fill the water tank with anything other than water. Using any additives such as cleaners or perfumes will damage the machine and void the warranty.
18. Do not overfill the water tank. Use measuring cup and fill to MAX line on tank.
19. Do not put hands or body parts over the steam outlet or into the vacuum inlet.

MR-50 OVERVIEW

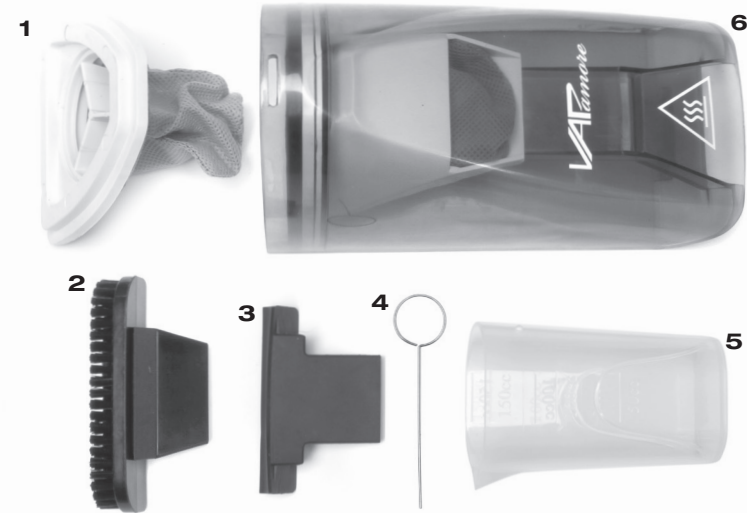

PARTS

- 1. Dust collection filter x 2.**
Captures and filters small dust particles. Easily removable and washable.
- 2. Nylon carpet and upholstery brush x 1.**
Use with steam for scrubbing stains on most any surface.
- 3. Smooth surface squeegee x 1.**
Use on smooth surfaces to remove spills.
- 4. Steam outlet cleaning tool X 1.**
For cleaning mineral deposits from the steam outlet hole.
- 5. Measuring / filling cup x 1.**
For easy filling of the water tank.
- 6. Removable Dust Collection Reservoir x 1.**
Holds both wet and dry spills. Easily removed for cleaning.

MR -50 Steam - Vac Features

Easy Glide Wheels

Helps to position and glide over spills for optimal cleaning results.

Water Tank

Holds 300mm of water to supply continuous steam.

Selector Switch

Four positions wet steam for deep stains, dry steam for general cleaning, off, and Vacuum for powerful wet - dry vacuum.

Specifications

Model: MR-50
Power Supply: 120v 60hz
Vacuum Motor: 120w
Vacuum Suction: .05bar
Heating Element Power: 1300w
Steam Pressure: 1.2bar
Volume Of Water Tank: 300cc
Pre Heating Time 20-30sec

OPERATION

WET - DRY VACUUM

1. Slide the power switch to Vacuum mode.



2. Using the easy glide wheels, position the MR-50 Steam - Vac over the spill (wet or dry) until it has been removed and stored into the removable dust collection reservoir.

3. When using on dry spills you can use the MR-50 Steam - Vac with or without the Nylon brush. Use the nylon brush to aid in agitating the spill area by inserting it into the mouth of the MR-50 Steam - Vac.


4. When using on wet spills ALWAYS use the smooth surface squeegee by inserting it into the mouth of the MR-50 Steam - Vac. The squeegee is to be used on all surfaces to remove wet spills.

DRY STEAM / WET STEAM


*Dry Steam mode produces a steam with less moisture and is used for sanitizing and light stain removal.

*Wet Steam mode produces a steam with heavy moisture and is used to help saturate and soak the stained area to aid in removal.

1. Fill the water tank using the supplied measuring cup to the MAX fill line. Using distilled or purified water will help prevent scale and mineral deposits and extend the life of the machine. (Never use any additives such as cleaners or perfumes in the water tank).



2. Slide the power switch to Dry Steam or Wet Steam mode.



3. After 20 seconds the MR-50 Steam - Vac will produce ultra heated, sanitizing steam. (Steam will not start immediately. Steam starts in approximately 20 seconds after the power switch is set to a steam mode. This 20 second delay is to allow the internal heating element to reach maximum temperature).

STAIN REMOVAL

Follow these three steps for removing all spills and stains. **EXTRACT... STEAM... EXTRACT.**

EXTRACT: Position the MR-50 Steam - Vac over the spill to remove as much of the original spill as possible following the directions in the WET - DRY VACUUM section above.

STEAM: Use the dry or wet steam mode along with the nylon brush to saturate, sanitize and remove the stained area.

EXTRACT: Position the MR-50 Steam - Vac over the spill following the directions in the WET - DRY VACUUM section above until it has been removed and stored into the removable dust collection reservoir.

*Note: In most cases the power of steam will be able to eliminate the stain with the lowest possible risk of damaging fabrics and carpets. Always use cleaning chemicals as a last resort and color test in a concealed area first.

TROUBLESHOOTING GUIDE

WET - DRY VACUUM

1. Connect power cord to a known good wall outlet.

2. Slide power switch to the vacuum mode.

3. Check power cord for any damage. (If damaged do not operate, have cord replaced by a qualified technician).

4. Empty the dust collection reservoir and remove any blockage in the dust tank mouth.

5. Clean or replace the dust filter.

DRY STEAM / WET STEAM

1. Connect power cord to a known good wall outlet.

2. Make sure water tank is filled.


3. Check power cord for any damage. (If damaged do not operate, have cord replaced by a qualified technician).

4. Slide power switch to the dry steam or wet steam mode.

5. Clean steam outlet with supplied tool. (Make sure the MR-50 Steam - Vac is unplugged from outlet during cleaning)

6. Wait 20 seconds for steam to be produced.

CLEANING THE MR-50 STEAM VAC (Make sure the MR-50 Steam - Vac is unplugged from outlet)

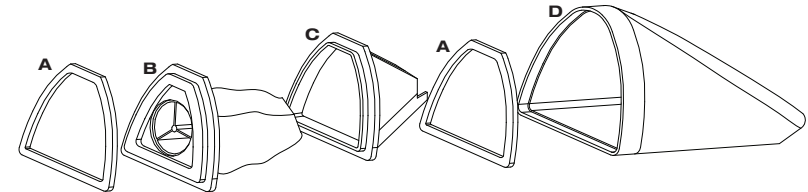

DUST COLLECTION RESERVOIR

- A. Rubber Gaskets x 2
- B. Dust collection Filter
- C. Plastic Dust Filter Adapter
- D. Dust collection Reservoir

1. To remove the dust collection reservoir by releasing the locking tab located on the underside and between the easy glide wheels.

2. Rinse the washable dust filter and dust collection reservoir under running hot water. Allow dust filter to dry completely before use.

STORAGE

Completely empty the water tank and use up remaining water in the tank and intake hose before turning off power and putting the unit in storage. Make sure there is no water inside the clear inlet tube and pump before storing.

STEAM OUTLET

Clean the steam outlet hole using the supplied tool to remove any mineral deposits or build up. The steam outlet hole is located on the underside and between the easy glide wheels.



**LIFETIME
WARRANTY**

Lifetime Limited Warranty for the Vapamore MR-50 Steam / Vac

Coverage:

1: Lifetime parts and labor on the pump, heating element and all internal electronics.

The Vapamore MR-50 Steam / Vac pump, heating element and all internal electronic parts are lifetime warranted to be free from defects in material and workmanship when utilized for normal household use by the original purchaser only.

2: One (1) year parts and labor on accessories and housing.

The Vapamore MR-50 Steam / Vac accessories and housing are warranted to be free from defects in material and workmanship for a period of one (1) year from the date of purchase when utilized for normal household use by the original purchaser only. This does not include replacement of items due to wear including but not limited to the nylon carpet and upholstery brush, smooth surface squeegee, dust collection filter, removable dust collection reservoir, housing and power cord.

For this warranty to apply the original purchaser must return the warranty registration form (included in the original packaging or available online at vapamore.com) along with a copy of the original purchase receipt to Vapamore 7464 East Tierra Buena Ln Suite 108 – Scottsdale, AZ 85260 within 15 days after the original purchase date.

Should any defect covered by the terms of this lifetime limited warranty be discovered, Vapamore will repair or replace any defective part provided the unit is returned by the original purchaser on file with the warranty form information.

The liability under this warranty is limited solely to the cost of the replacement parts or the complete unit at the discretion of Vapamore. This warranty is void if damage is resulting from accident, misuse, improper operation, unauthorized repair or alteration, tampering, substance other than distilled water used in the boiler tank, commercial or other than home use, or damages accruing in transit. This warranty does not cover any shipping fees to or from our facility.

This warranty is extended to the original purchaser only and excludes all other legal and / or conventional warranties. The responsibility of Vapamore, if any is limited to the specific obligations expressly assumed by it under the terms of the lifetime limited warranty. In no event is Vapamore liable for incidental or consequential damages of any kind whatsoever.

Customer is responsible for all shipping fees to and from our facility. Carefully pack returning items for repair to avoid damage in transit. Be sure to include in the box all your contact information including name, phone number, email address and shipping address along with a prepaid return ship tag from UPS or FedEx. Vapamore does not ship and will not accept items sent via USPS. Contact Vapamore at 480-951-8900 or email customersupport@vapamore.com for making arrangements to return items for repair or service. Vapamore is not responsible for any shipping cost to or from our facility.

VAPamore[®]
tel. 480.951.8900 / fax. 480.951.8902
www.vapamore.com

